


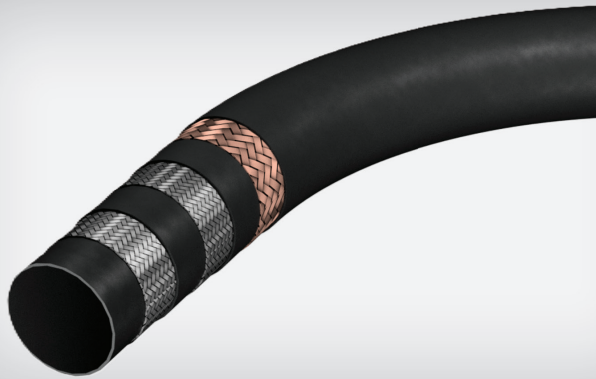

# SULFUR DIOXIDE

## Discharge Hose (Wet)

### N2683

#### APPLICATION AND KEY POINTS:

- Specifically designed for sulfur dioxide wet service 100% concentration

#### TEMPERATURE RANGE:

- -40°F to +180°F

#### BURST PRESSURE:

- Minimum 4:1

#### MATERIAL TUBE:

- Smooth, seamless extruded EPDM
- High heat resistance
- Low permeation

#### REINFORCEMENTS:

- Multiple high-tensile stainless steel wire braids
- Stainless steel wires provide excellent corrosion resistance
- Single high-tensile textile braid

#### MATERIAL COVER:

- Black EPDM
- Abrasion, weather, and ozone resistant

#### BRANDING:

- Embossed stripe: GOODALL® N2683 SULFUR DIOXIDE SERVICE ONLY SS WIRE 250 PSI W.P. TO BE INSPECTED PRIOR TO EACH USE MFR C\*\*\* MADE IN CANADA 10001

\*\*\* Year - Month

#### STANDARD LENGTHS:

- 100 feet

### TECHNICAL SPECIFICATIONS

| ID (in) | OD (in) | Max WP (psi) | Min BR (in) | Weight (lb/ft) |
|---------|---------|--------------|-------------|----------------|
| 1       | 1.52    | 250          | 5           | 0.68           |
| 1 ½     | 2.12    | 250          | 7           | 1.18           |
| 2       | 2.73    | 350          | 9           | 1.78           |

All data at 68° F