


## CROCODILE WATER HOSE

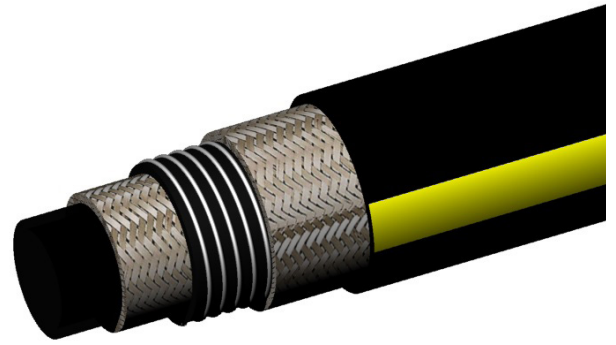

**APPLICATION:**

- Heavy-duty water suction hose for use in quarries, on large construction projects or other areas where an extra rugged heavy-duty cover hose is required

**TEMPERATURE:**

- -40°F to +180°F

**PRESSURE:**

- 250 PSI
- Minimum 4:1 Safety Factor

**MANUFACTURING REGISTRATION:**

- ISO 9001 Quality
- ISO 14001 Environmental

**TUBE:**

- Extruded, high grade EPDM

**REINFORCEMENT:**

- High tensile textile braid, with dual steel helix wire

**COVER:**

- Black, Abrasion, Weather & Ozone resistant EPDM
- Yellow longitudinal stripe

**MYLAR BRANDING:**

- 'Goodall N2582 Crocodile Water Suction 250 PSI Max W.P. Made in Canada 10001. Refer to Industry Recommendations for Proper Care & Maintenance'

### Technical Specifications

Specification	Code	Inner Diameter	Outer Diameter	Working Pressure	Weight	Standard Length	Bending Radius
		inch	inch	PSI	lbs/ft	ft	inch
<b>N2582</b>	316001000015	1"	1.56"	250	0.60	100	4.0"
	316001250009	1 1/4"	1.81"	250	0.71	100	5.0"
	316001500014	1 1/2"	2.06"	250	0.82	100	6.0"
	316002000013	2"	2.53"	250	1.05	100	6.5"
	316002500008	2 1/2"	3.04"	250	1.28	100	8.0"
	316003000008	3"	3.72"	250	1.91	100	15.0"
	316004000012	4"	4.61"	250	2.64	100	21.5"